




Maintenance-free  
AGM TPPL  
Rechargeable VRLA  
battery for military  
applications

12FV95-C

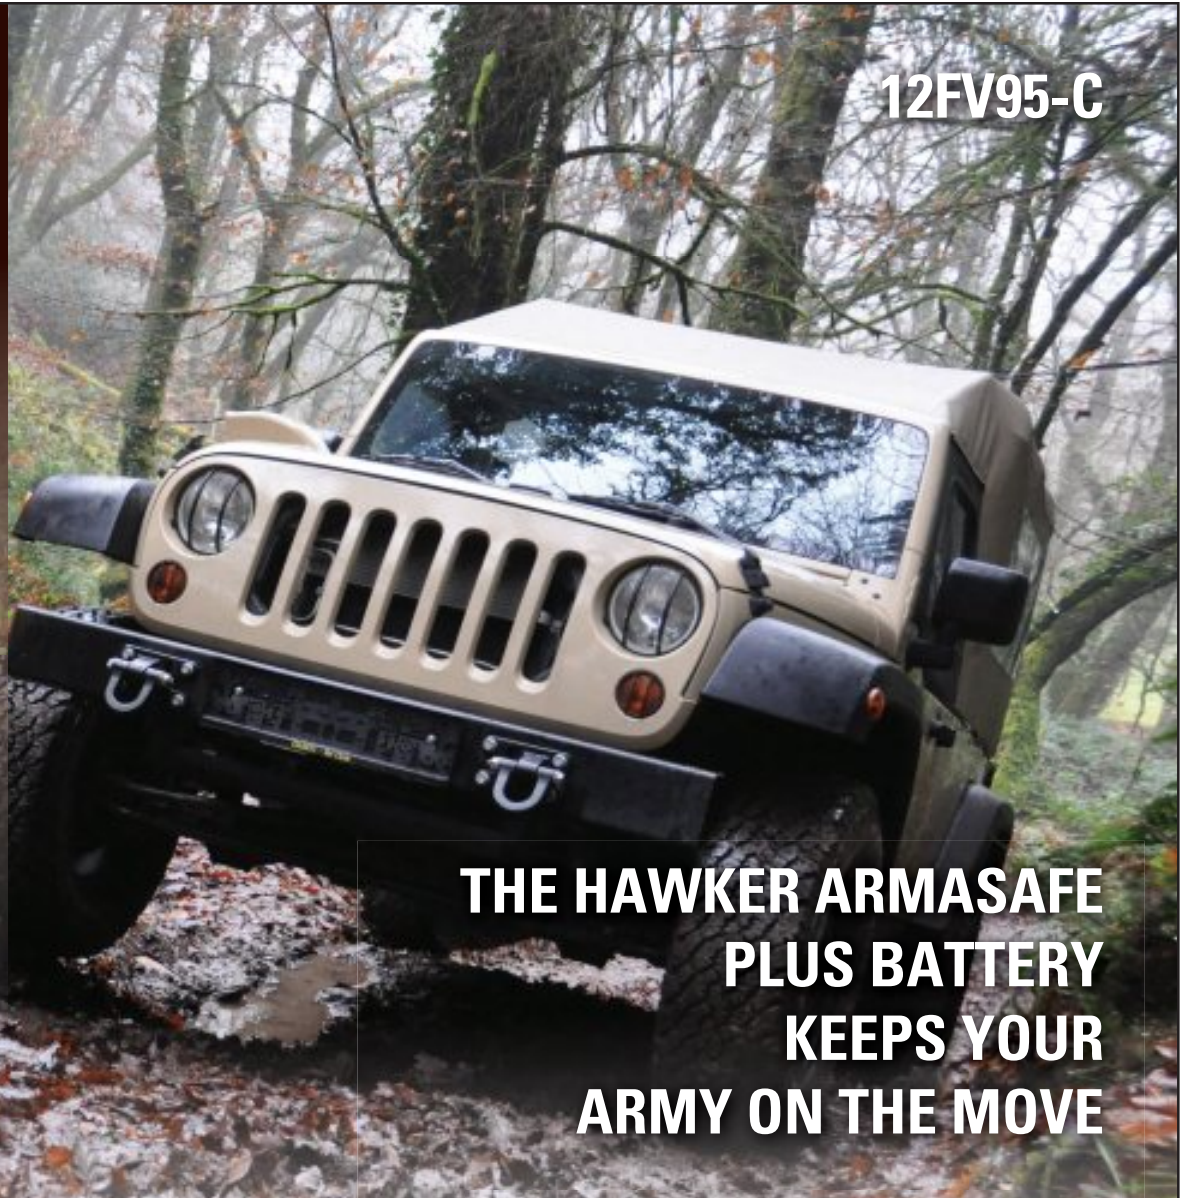

**THE HAWKER ARMASAFE  
PLUS BATTERY  
KEEPS YOUR  
ARMY ON THE MOVE**

**ARMASAFE**  
*plus*



The **ARMASAFE Plus** series utilises the proven EnerSys® Thin Plate Pure Lead valve regulated technology, to meet the diverse and demanding energy storage needs of the modern world. Today over 2 million batteries have been installed on a wide range of combat and tactical vehicles throughout the world.

EnerSys TPPL technology packs more power into the same space as a conventional battery, as well as reducing the corrosion and water losses through the purity of the materials used in construction, providing extended storage and service life as well as increasing the resistance to abusive deep discharges.

The inherent design of the VRLA Armasafe battery minimises gas evolution and eliminates the need to top up periodically with water. The electrolyte is fully absorbed into the glass mat separators between the positive and negative plates, which mean there is no free acid within the battery case; this gives increased flexibility in mounting position.



# 12FV95-C

Part number: 9750N7071



## SPECIFICATIONS:

### Technical Data:

|                                  |                      |
|----------------------------------|----------------------|
| Technology                       | *TPPL / *AGM / *VRLA |
| Nominal Voltage                  | 12 V                 |
| Charging Voltage                 | 14.4 V @ 20 °C       |
| Float Voltage                    | 13.74 V @ 20 °C      |
| Nominal Capacity C <sub>20</sub> | 95 Ah                |
| Nominal Capacity C <sub>5</sub>  | 81 Ah                |
| CCA (EN)                         | 750 A                |
| Internal Resistance              | 3 mΩ                 |
| Temperature Performance Range    | -40°C to +80°C       |
| Cycle life at 20% of DoD         | 3500                 |
| Cycle life at 50% of DoD         | 1650                 |
| Cycle life at 80% of DoD         | 680                  |
| Weight                           | 27.3 kg              |
| Storage                          | 60 Months            |
| Storage at 25°C without recharge | 30 Months            |
| Flame Retardancy                 | Non Flame Retardant  |
| Terminals                        | EN50342-2            |


\*TPPL: Thin Plate Pure Lead  
 \*AGM: Absorbed Glass Mat  
 \*VRLA: Valve Regulated Lead Acid

### Features & Benefits:

Designed in compliance with **EN 50342**

- Installation orientation: can be mounted in any orientation except inverted
- Recombination efficiency 99%
- Integrated flame arresters - Protection against flame transmission
- UN Transportation classification UN2800-Class 8 exempt
- 97% Recyclability
- Shock resistant
- Maintenance-free
- Long shelf life
- Resistant to abusive discharges
- Superior cold cranking performance
- Excellent cyclic capability
- Superb charge acceptance

## Dimensions:

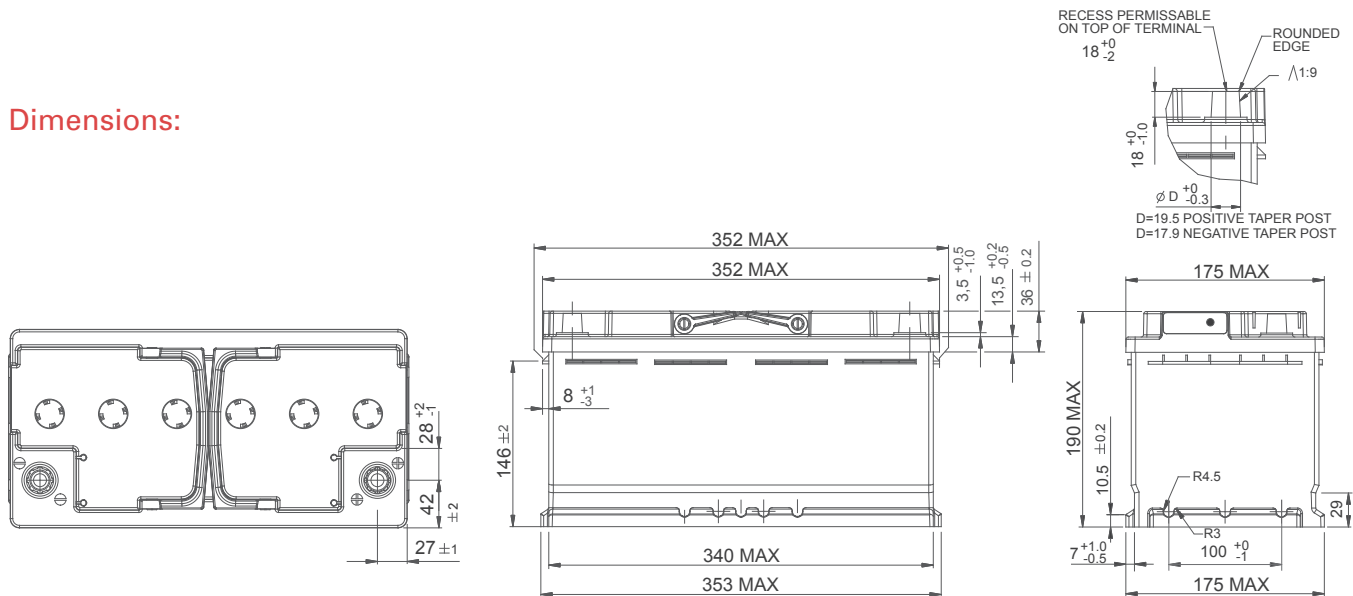

Energys\_ArmaSafe\_Plus\_12FV95-C\_Mar-2012\_V01\_EN



EnergSys EMEA Headquarter  
**EH Europe GmbH**  
 Löwenstrasse 32  
 8001 Zürich  
 Switzerland

For enquiries please contact:  
 Tel: +48 33 822 53 91  
 Fax: +48 33 822 52 09  
 AandD.Sales@ch.energys.com

Contact: